

65,000 AMP PROTECTION

The Titan 65DR delivers DIN Rail mounted surge protection and noise filtration inside electronic equipment cabinets. It is designed to be DIN Rail mounted to the incoming power source, isolating the cabinet from the outside environment.

Compliant with UL 1449 2.5 Edition requirements dated February 9, 2007.



APPLICATIONS

The Titan 65DR is ideal for cabinet builders as well as manufacturers and integrators of industrial, medical and commercial instrumentation equipment.

SUPERIOR PERFORMANCE

The Titan 65DR utilizes a hybrid suppression circuit that provides 65,000 peak amps of surge protection. Incorporating the same hybrid circuit generally reserved for the more expensive devices, the Titan 65DR offers sine wave tracking, tight clamping and noise filtration for superior protection.

The Titan 65DR provides safe and reliable operation by incorporating EFI's latest safety developments including EFI's trademark fusing technology, LightningTemp®. Each MOV is individually fused and the product is contained in a NEMA 1 housing for maximum safety. The 65DR has been tested and is a UL recognized component and is CE certified.

EASY INSTALLATION

The Titan 65DR mounts quickly and easily to (number 43880, 35mm) DIN Rails while screw lugs provide easy parallel or Kelvin connection in the power system. The small footprint of the Titan 65DR even provides greater installation flexibility in situations where space is limited.

FEATURES	ADVANTAGES	BENEFITS
COMPACT DESIGN	Allows fast and easy mounting inside equipment cabinets	Eliminates costly customization to cabinet designs
DIN RAIL MOUNTING DESIGN	Provides mounting flexibility for manufacturers using DIN Rail construction	Allows suppressor to be attached and installed in minutes
GREEN STATUS LED	Provides continuous status indication	Prevents unknown loss of protection
LIGHTNINGTEMP® FUSE	Offers protection from extreme surge currents	Provides reliable operation and prevents dangerous thermal run away when MOVs are damaged

TITAN[®] 65DR Product Specifications



PERFORMANCE

Max Surge Current 65KA/phase,
L-N 32.5KA, L-G 32.5KA, N-G 16KA
EMI/RFI Noise Rejection Up to -40dB
Sine Wave Tracking Yes
(except 65DR600 model)

MECHANICAL DESCRIPTION

Dimensions 2.28" x 2.82" x 3.5"
(Single Phase)
2.28" x 7.75" x 3.5"
(Three Phase)
Housing Ratings NEMA 1
Product Weight 0.5 lb (Single Phase)
1 lb (Three Phase)

MECHANICAL DESCRIPTION (CONT'D)

Connection Method Dual #12
AWG Terminals
Mounting Method Parallel
(for use on DIN 43880 rail)
Thermal Fusing Yes,
LightningTemp[®] Fuse
Storage Temperature -40° to +160° F
(-40° to +70° C)
Operating Temperature -40° to +140° F
(-40° to +60° C)
Operating Altitude Sea Level to
12,000 feet (3,658 Meters)
Operating Frequency 50/60/400Hz
Parallel Unlimited
Kelvin/Series 20 Amps

DIAGNOSTICS

Green Status LED, Audible Alarm,
Diagnostic Contact

SAFETY APPROVALS


UL 1449 2nd Edition, C

WARRANTY


Product 10 years

TITAN 65DR

Single Phase



Three Phase

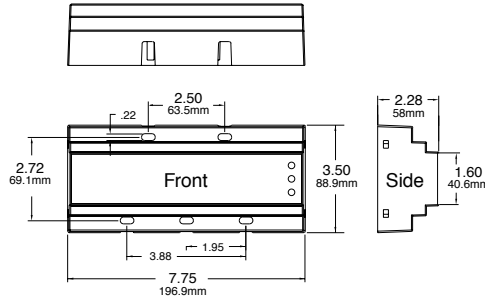

TITAN 65DR SYSTEM DESCRIPTION			UL 1449 2-ND EDITION				ANSI C 62.41 CLAMPING VOLTAGE		
Model	Configuration	MCOV	L-N	L-G	N-G	L-L	Cat A	Cat B3	Cat C1
Titan 65DR	120 1 Phase, 2-wire + G	150	400	400	400	N/A	328	400	464
Titan 65DR	230 1 Phase, 2-wire + G	320	800	800	800	N/A	504	664	904
Titan 65DR	400 3 Phase, 3-wire + G	320/640	N/A	800	N/A	1800	744/468	756/1296	864/1672
Titan 65DR	600 3 Phase, 3-wire + G	780	N/A	900	N/A	1800	1620	1700	1700v